



## Daylight Power Beam 18kW/12kW

### LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- High Reflective Parabolic Glass Mirror
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot



# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Power Beam 18kW/12kW


### SPECIFICATIONS

Identify No.	L18012DPB	
Capacity	18,000W / 12,000W	
Lamp Bulb Voltage	225V / 160V	
Parabolic Reflector	Ø914mm	[35.9in]
UV Protective Lens	Ø883mm	[34.7in]
Lamp Type	HMI 18000W SE or HMI 12000W SE	
Color Temp.	5600K	
Lamp Holder	GX51 / GX38	
Stirrup	with Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	260 °C / 200 °C	[500 °F / 392 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	22.5m / 20m	[73.8ft / 65.6ft]
Min. Distance to Flammable Object	2m	[6.6ft]
Operating Range	+30° ~ 0° ~ -30°	
Weight (lamphead)	95kg	[209 lbs]

### ACCESSORIES



### PHOTOMETRIC DATA

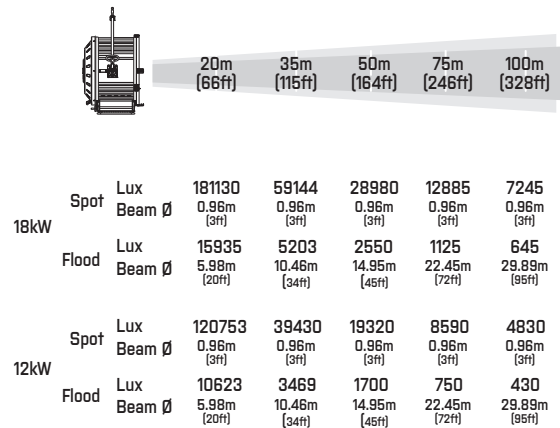

### DIMENSIONS (in)

