



Daylight Fresnel 12000W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm (19-5/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 12000W SE


SPECIFICATIONS

Identify No.	L12000DS
Capacity	12,000W
Lamp Bulb Voltage	160V
Fresnel Lens	Ø500mm (19-5/8 in.)
Lamp Type	MSR 12000HR or HMI 12000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	200 °C (392 °F)
Max. Ambient Temp.	45 °C (113°F)
Min. Distance to Illuminated Object	15 m (49 ft)
Min. Distance to Flammable Object	2 m (6 ft)
Operating Range	+38° ~ 0° ~ -38°
Weight (lamphead)	51.0 kg (112.4 lbs)
Weight (with barndoor)	55.5 kg (122.4 lbs)

ACCESSORIES

- Electronic Ballast V3 : 18kW/12kW or 12kW/6kW
- Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø622mm (24-1/2 in.): Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

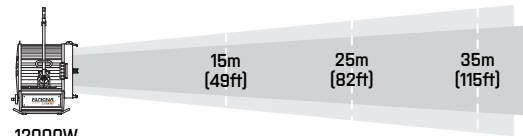

12000W

Spot [6°]			
Lux	39727	14302	7297
Beam Ø	1.57m (5.2ft)	2.62m (8.6ft)	3.67m (12ft)
Flood [54°]			
Lux	2397	863	440
Beam Ø	15.29m (50.2ft)	25.48m (83.6ft)	35.67m (117ft)

DIMENSIONS (in)

