



Daylight Fresnel 6000W SE

■ LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø450mm (17-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 6000W SE

■ SPECIFICATIONS

Identify No.	L06000DS	
Capacity	6,000W	
Lamp Bulb Voltage	125V	
Fresnel Lens	Ø450mm	(17-3/4 in.)
Lamp Type	MSR 6000HR or HMI 6000W/SE	
Color Temp.	5600K	
Lamp Holder	GX38	
Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	200 °C	[392 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	12 m	[40 ft]
Min. Distance to Flammable Object	1.5 m	[4.9 ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (lamphead)	37.6 kg	[82.8 lbs]
Weight (with barndoor)	42.6 kg	[93.9 lbs]

■ ACCESSORIES

Electronic Ballast V3 : 12kW/6kW or 6000W

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø533mm (21 in.):


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

■ PHOTOMETRIC DATA

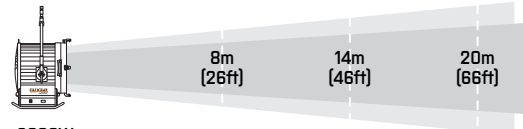

6000W

	8m (26ft)	14m (46ft)	20m (66ft)
Spot [6°]			
Lux	59653	19479	9545
Beam Ø	0.84m (2.7ft)	1.47m (4.8ft)	2.10m (6.9ft)
Flood [65°]			
Lux	4498	1469	720
Beam Ø	10.19m (33.4ft)	17.84m (58.5ft)	25.48m (83.6ft)

■ DIMENSIONS (in)

