

Daylight Faceted PAR F4k



■ LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø335mm (13in) UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Faceted PAR F4k


■ SPECIFICATIONS

Identity No.	L04000FP	
Capacity	4,000W	
Lamp Bulb Voltage	200V	
UV Protective Lens	Ø335mm (13in)	
Lamp Type	HMI 4000W/SE	
Color Temp.	5600K	
Lamp Holder	G38	
Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	190 °C	[374°F]
Max. Ambient Temp.	45 °C	[113°F]
Min. Distance to Illuminated Object	10 m	[33ft]
Min. Distance to Flammable Object	1 m	[3ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (Lamphead)	19.0 kg	[42lbs]
Weight (with barndoor)	22.0 kg	[49lbs]

■ PHOTOMETRIC DATA

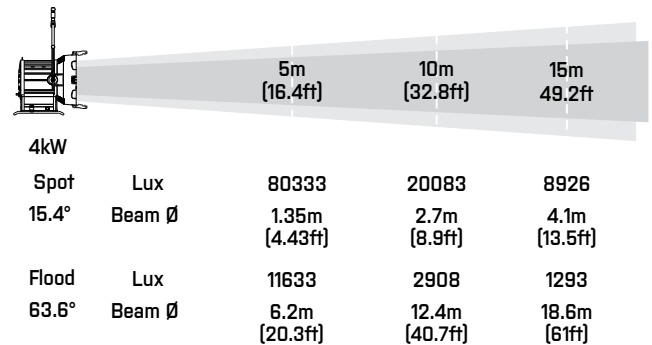

■ DIMENSIONS (in)

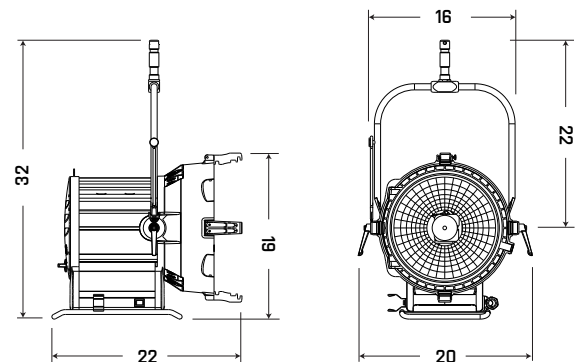

■ ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrim : Ø394mm (15-1/2 in.)
- Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring