

Daylight Faceted PAR F800



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø208mm (8.19)in UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Faceted PAR F800

SPECIFICATIONS

| | | |
|-------------------------------------|--------------------------|-------------|
| Identity No. | L00800FP | |
| Capacity | 800W | |
| Lamp Bulb Voltage | 95V | |
| UV Protective Lens | Ø208mm (8.19in) | |
| Lamp Type | CSR 800W SE/HR | |
| Color Temp. | 5600K | |
| Lamp Holder | G22 | |
| Stirrup | Ø28mm (1-1/8 in.) Spigot | |
| Class / IP Rating | 1 / IP 23 | |
| Max. Surface Temp. | 150 °C | [302°F] |
| Max. Ambient Temp. | 45 °C | [113°F] |
| Min. Distance to Illuminated Object | 3.5 m | [11.48 ft] |
| Min. Distance to Flammable Object | 0.5 m | [1.64 ft] |
| Operating Range | +45° ~ 0° ~ -45° | |
| Weight (Lamphead) | 6.7 kg | [14.77 lbs] |
| Weight (with barndoor) | 8.0 kg | [17.64 lbs] |

ACCESSORIES

Electronic Ballast V3 : 800W/575W or 800W/575W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø254mm (10 in)

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

Spill Ring

PHOTOMETRIC DATA

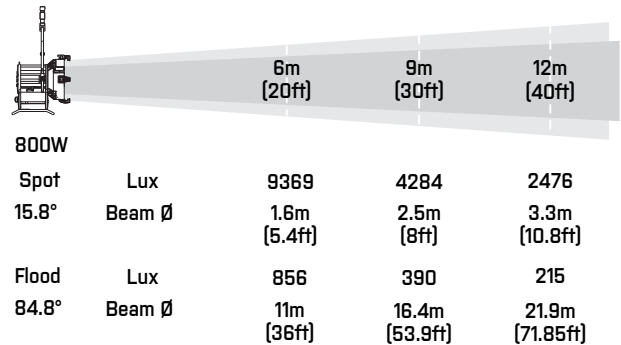

DIMENSIONS (in)

