

# FILMGEAR

## LED MAXIBRUTE

# Max II 12

RGB

WEATHER RESISTANT IP65

### PRODUCT FEATURES

- CRI > 96 and TLCI > 95
- CCT Mode : 2700K to 10000K  
+/- Green / Magenta
- HSI Mode : Hue, Saturation & Intensity
- Gel Mode : > 300 Filters
- Communication : DMX XLR-5,  
CRMX (LumenRadio),  
Bluetooth,  
Ethernet,  
USB A

- Pattern Mode (User Define) :



- Individual Pixel Control :



- Scene Mode :




### ACCESSORIES


- Diffuser w/ bag



- Softbox



- Eggcrate  
for Softbox



- Bluetooth  
Remote  
Control






## LAMPHEAD CONTENTS

- Lamp Housing
- Stirrup with Ø28mm Spigot
- AC Power Cable

## PHOTOMETRIC DATA

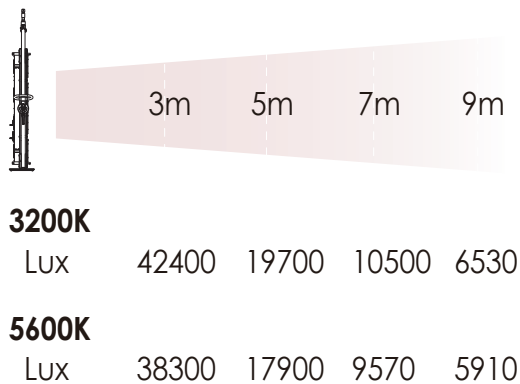

## SPECIFICATIONS

Identity No.	L120MXLC2
Max. Capacity	2160W
Input Voltage	100 - 240V AC 50/60 Hz
Input Current	10A@220V AC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >96
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX / RDM
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 65
Weight	59kg

## DIMENSIONS (mm)

