

PZB300
16° - 28°





LED Profile 300(16°-28°)



■ LAMPHEAD CONTENTS

- Lamp Housing(black color)
- Barrel
- Stirrup with Ø28mm(1-1/8 in.)Spigot
- Filter Frame
- Set of 4 Cutters
- Power Cable

SPECTRUM

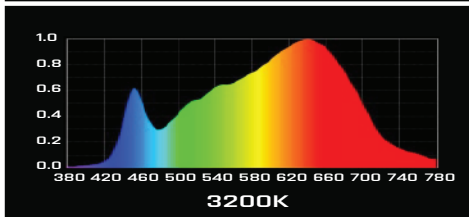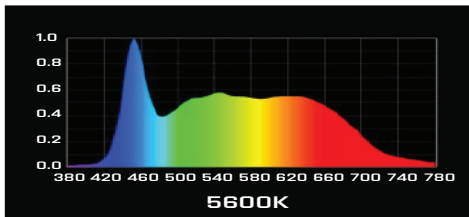

HISTOGRAM

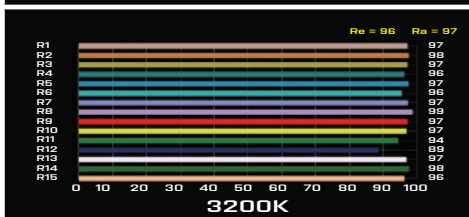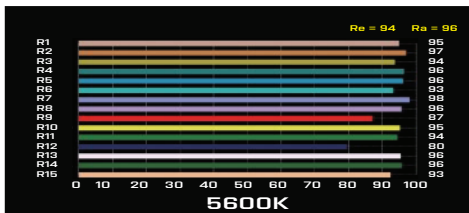

LED Profile 300(16°-28°)

■ SPECIFICATIONS

Identity No.	L301628PZB
Max. Capacity	300W
Voltage	95 - 260V AC 50Hz / 60Hz 22 - 36V DC
Current	1.4A @220V AC 12.5A @24V DC
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Beam Angle	16°-28°
Dimming	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm(1-1/8 in.)Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C [140 °F]
Max. Ambient Temp.	35 °C [95 °F]
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	13.0 kg [28.7 lbs]
Weight (Lamphead)	8.5 kg [18.7 lbs]

■ ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable(for lamphead)

■ PHOTOMETRIC DATA

		7m (23ft)	9m (30ft)	10m (33ft)
5600K	16° Lux Beam Ø	3594 1.97m (6.5ft)	2200 2.53m (8.3ft)	1718 2.81m (9.2ft)
	28° Lux Beam Ø	1352 3.49m (12.9ft)	807 4.49m (14.7ft)	653 4.99m (16.4ft)
3200K	16° Lux Beam Ø	2582 1.97m (6.5ft)	1593 2.53m (8.3ft)	1223 2.81m (9.2ft)
	28° Lux Beam Ø	967 3.49m (12.9ft)	577 4.49m (14.7ft)	469 4.99m (16.4ft)

■ DIMENSIONS (in)

