

PZB300
25°- 50°





LED Profile 300(25°-50°)



■ LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm(1-1/8 in.) Spigot
- Set of 4 Cutters
- Power Cable

SPECTRUM

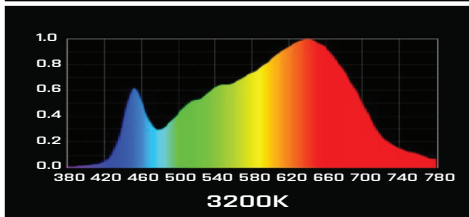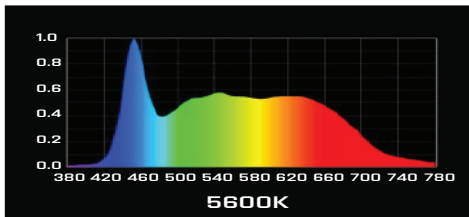

HISTOGRAM

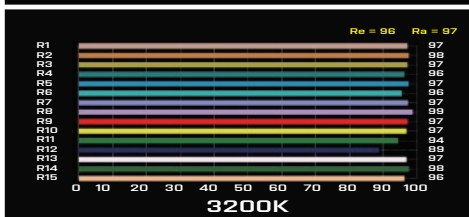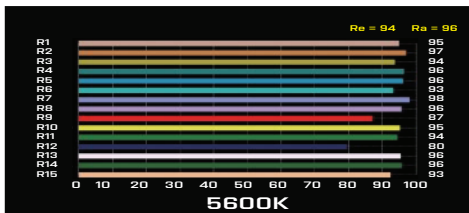

LED Profile 300(25°-50°)

■ SPECIFICATIONS

Identity No.	L302550PZB
Max. Capacity	300W
Voltage	95 - 260V AC 50Hz / 60Hz 22 - 36V DC
Current	1.4A @220V AC 12.5A @24V DC
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Beam Angle	25°-50°
Dimming	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm(1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C [140 °F]
Max. Ambient Temp.	35 °C [95 °F]
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	12.0 kg [26.5 lbs]
Weight (Lamphead)	8.5 kg [18.7 lbs]

■ ACCESSORIES

Hook Clamp

Iris

Gobo Adapter

Safety Cable(for lamphead)

■ PHOTOMETRIC DATA

			5m (16ft)	6m (20ft)	7m (23ft)
5600K	25°	Lux	3206	2226	1688
		Beam Ø	2.22m (7.3ft)	2.66m (8.7ft)	3.10m (10.2ft)
5600K	50°	Lux	1059	735	549
		Beam Ø	4.66m (15.3ft)	5.60m (18.4ft)	6.53m (21.4ft)
3200K	25°	Lux	2365	1642	1248
		Beam Ø	2.22m (7.3ft)	2.66m (8.7ft)	3.10m (10.2ft)
3200K	50°	Lux	780	542	411
		Beam Ø	4.66m (15.3ft)	5.60m (18.4ft)	6.53m (21.4ft)

■ DIMENSIONS (in)

