

LED SL PANEL 100 (Bi-Color)

LAMPHEAD CONTENTS

- Lamp Housing
- Diffuser
- Stirrup with Ø16mm (5/8 in.) Socket
- Power Supply & Power Cable

SL100



LED SL PANEL 100(Bi-Color)

SPECIFICATIONS


Identity No.	L0010BSL
Max. Capacity	109W
Voltage	18 - 28V DC
Current	4.5A @ 24V
Color Temp.	Adjustable 2700K - 5600K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C (140 °F)
Max. Ambient Temp.	45 °C (113 °F)
Operating Range	+90° ~ 0° ~ -90°
Weight	6.0 kg (13.2 lbs)

POWER SUPPLY

Capacity	120W
Inout	100 - 240 AC
Output	24V DC 5A


ACCESSORIES

- 4-leaf Barndoor
- V-mount Battery
- Safety Cable(for lamphead)


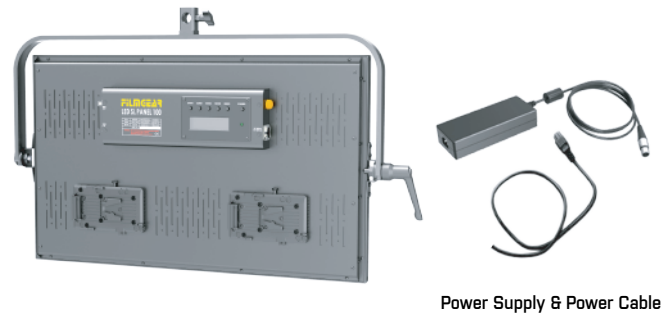


Power Supply & Power Cable



DIMENSIONS (in)

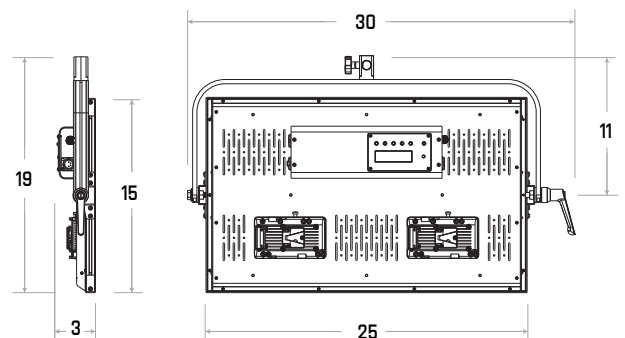



■ PHOTOMETRIC DATA

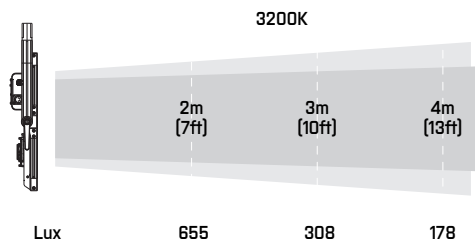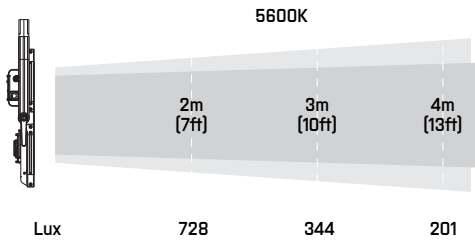

■ SPECTRUM

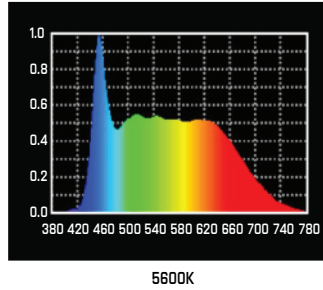

■ HISTOGRAM



■ POWER SUPPLY

