


LED SL PANEL 200 (Bi-Color)

LAMPHEAD CONTENTS

- Lamp Housing
- Diffuser
- Stirrup with Ø28mm(1-1/8 in.) Spigot
- Power Supply & Power Cable

SL200

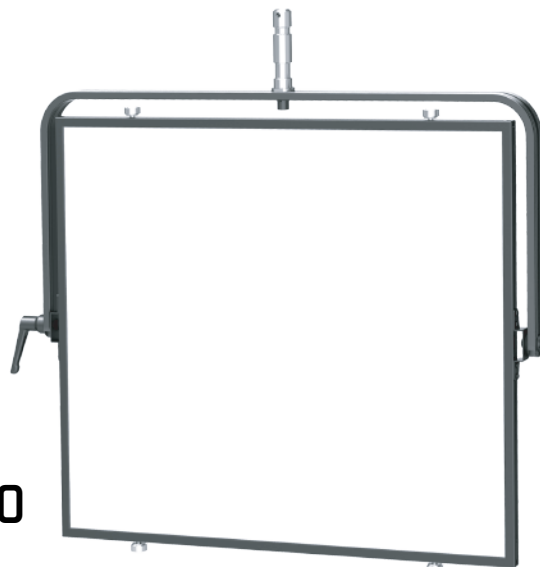

LED SL PANEL 200 (Bi-Color)

SPECIFICATIONS

Identity No.	L0020BSL
Max. Capacity	218W
Voltage	18 - 28V DC
Current	9A @ 24V
Color Temp.	Adjustable 2700K - 5600K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm(1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C (140 °F) _v
Max. Ambient Temp.	45 °C (113 °F)
Operating Range	+90° ~ 0° ~ -90°
Weight	13.0 kg (28.7 lbs)

POWER SUPPLY

Capacity	220W
Inout	100 - 240 AC
Output	24V DC 9.2A

ACCESSORIES

4-leaf Barndoor


V-mount Battery

Safety Cable(for lamphed)




Power Supply & Power Cable



DIMENSIONS (in)

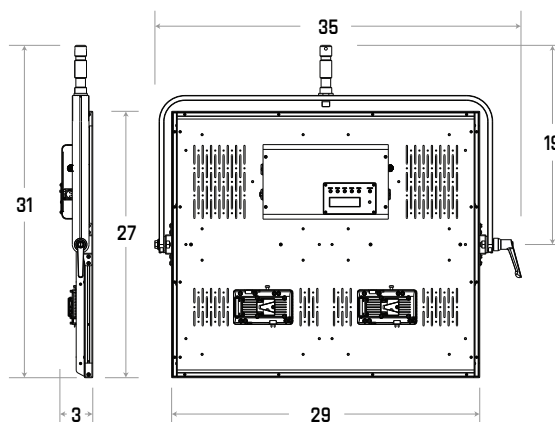



PHOTOMETRIC DATA

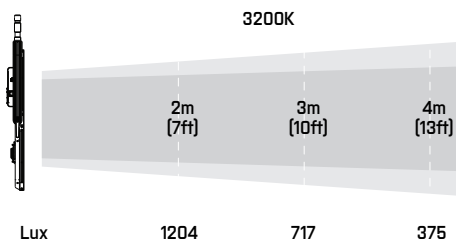

SPECTRUM



HISTOGRAM



POWER SUPPLY

