



# Power Beam Hybrid Daylight 9k/6kW Tungsten 12k/10kW

## LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
- On-Off Switch
- Stirrup with Ø28mm (1.1in) Spigot
- Lamphead to EB Cable 10m [32.8ft]
- Inlet Cable 10m [32.8ft] (Bare End)

# Exclude Lamp Bulb


# HMI Mode : Requires Electronic Ballast

## Power Beam Hybrid D9T12

### SPECIFICATIONS

Identity No.	L0900PBH
Capacity	Daylight : 9,000W / 6,000W Tungsten : 12,000W / 10,000W
Voltage	Daylight : 160V / 125V Tungsten : 200 - 240V AC
Parabolic Reflector	Ø628mm [24.7in]
Protective Lens	Ø645mm [25.3in]
Lamp Type	HMI 9kW / 6kW SE Tungsten 12kW / 10kW SE
Lamp Base	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C [428°F]
Min. Distance to Illuminated Object	18m [59ft]
Min. Distance to Flammable Object	1.5m [4.9ft]
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	61kg [134.4lbs]

### DIMENSIONS (in)

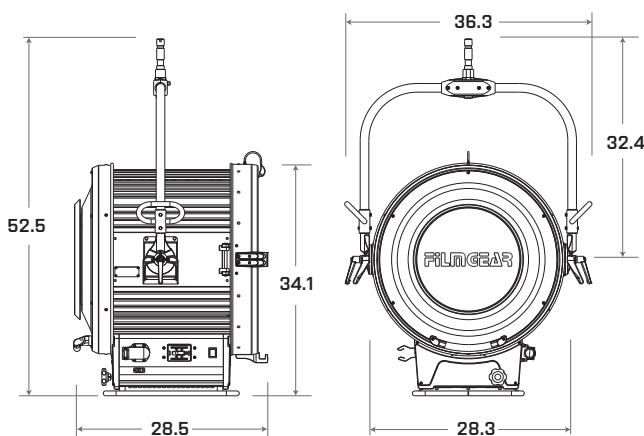


### PHOTOMETRIC DATA


		DAYLIGHT 9k/6kW				
		15m (49.2ft)	25m (82ft)	50m (164ft)	75m (246ft)	100m (328ft)
9kW	Lux	190000	68400	17100	7600	4275
	Spot Beam Ø	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)
6kW	Lux	147217	53000	13250	5889	3312
	Spot Beam Ø	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)	0.61m (2ft)
Flood	Lux	19111	6880	1720	764	430
	Beam Ø	3.6m (11.8ft)	6.00m (19.6ft)	12.01m (39.4ft)	18.01m (59ft)	24.02m (78.8ft)
Flood	Lux	15111	5440	1360	604	340
	Beam Ø	3.6m (11.8ft)	6.00m (19.6ft)	12.01m (39.4ft)	18.01m (59ft)	24.02m (78.8ft)

		TUNGSTEN 12k/10kW				
		15m (49.2ft)	25m (82ft)	50m (164ft)	75m (246ft)	100m (328ft)
12kW	Lux	32400	5184	1296	576	324
	Spot Beam Ø	1.3m (4.2ft)	3.25m (10.6ft)	6.5m (21.3ft)	9.74m (31.9ft)	12.99m (42.6ft)
10kW	Lux	30290	4846	1212	538	303
	Spot Beam Ø	1.3m (4.2ft)	3.25m (10.6ft)	6.5m (21.3ft)	9.74m (31.9ft)	12.99m (42.6ft)
Flood	Lux	6800	1088	272	121	68
	Beam Ø	4.29m (14ft)	10.74m (35.2ft)	21.47m (70.4ft)	32.21m (105.6ft)	42.95m (140.9ft)
Flood	Lux	6350	1016	254	113	64
	Beam Ø	4.29m (14ft)	10.74m (35.2ft)	21.47m (70.4ft)	32.21m (105.6ft)	42.95m (140.9ft)


### ACCESSORIES




9k/6kW  
Electronic Ballast




9k/6kW Head to  
Ballast Cable



12k/10kW Cable  
(Bare End)



Scrim with Bag



Transport Case