



Power Beam Hybrid Daylight 4k/2.5kW Tungsten 5k/2kW

LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
- On-Off Switch
- Stirrup with Ø28mm (1.1in) Spigot
- Lamphead to EB Cable 7m (22.9ft)
- Inlet Cable 7m (22.9ft) (Bare End)

Exclude Lamp Bulb


HMI Mode : Requires Electronic Ballast

Power Beam Hybrid D4T5

SPECIFICATIONS

Identity No.	L0400PBH
Capacity	Daylight : 4,000W / 2,500W Tungsten : 5,000W / 2,000W
Voltage	Daylight : 200V / 115V Tungsten : 100 - 250V AC
Parabolic Reflector	Ø498mm (19.6in)
Protective Lens	Ø500mm (19.6in)
Lamp Type	HMI 4000W SE / 2500W SE Tungsten 5000W SE / 2000W SE
Lamp Base	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	210 °C (410 °F)
Min. Distance to Illuminated Object	15m (50ft)
Min. Distance to Flammable Object	1.2m (3.9ft)
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	40kg (88.1lbs)

DIMENSIONS (in)

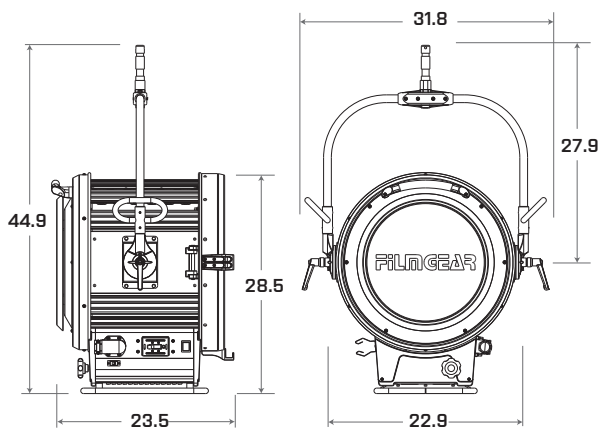


PHOTOMETRIC DATA


		DAYLIGHT 4k/2.5kW				
		10m (32.8ft)	25m (82ft)	50m (164ft)	75m (246ft)	100m (328ft)
4kW Spot	Lux	151470	24240	6060	2690	1520
	Beam Ø	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)
Flood	Lux	19920	3190	800	350	200
	Beam Ø	2.4 m (7.8ft)	6 m (19.6ft)	12.01 m (39.4ft)	18.01 m (59ft)	24.02 m (78.8ft)
2.5kW Spot	Lux	109160	17470	4370	1940	1090
	Beam Ø	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)	0.61 m (2ft)
Flood	Lux	12460	2030	510	230	130
	Beam Ø	2.4 m (7.8ft)	6 m (19.6ft)	12.01 m (39.4ft)	18.01 m (59ft)	24.02 m (78.8ft)

		TUNGSTEN 5k/2kW			
		7.5m (24.6ft)	20m (65.6ft)	35m (114.8ft)	50m (164ft)
5kW Spot	Lux	32000	4500	1469	720
	Beam Ø	1.28 m (4.1ft)	3.4 m (11.1ft)	5.95 m (19.5ft)	8.5 m (31.1ft)
Flood	Lux	3653	514	168	82
	Beam Ø	3.38 m (11ft)	9 m (29.5ft)	15.75 m (51.6ft)	22.5 m (73.8ft)
2kW Spot	Lux	35556	5000	1633	800
	Beam Ø	0.83 m (2.7ft)	2.2 m (7.2ft)	3.85 m (12.6ft)	5.5 m (18ft)
Flood	Lux	1557	219	72	35
	Beam Ø	3.38 m (11ft)	9 m (29.5ft)	15.75 m (51.6ft)	22.5 m (73.8ft)


ACCESSORIES




4k/2.5kW
Electronic Ballast




4k/2.5kW Head to
Ballast Cable



5k/2kW Cable
(Bare End)



Scrim with Bag



Transport Case