



Power Beam Hybrid Daylight 1.8kW/1.2kW Tungsten 2000W

LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
- On-Off Switch
- Stirrup with Ø28mm (1.1in) Spigot
- Lamphead to EB Cable 7m
- Inlet Cable 7m (22.9ft) (Bare End)

Exclude Lamp Bulb


HMI Mode : Requires Electronic Ballast

Power Beam Hybrid D1.8T2

SPECIFICATIONS

Identity No.	L0180PBH
Capacity	Daylight : 1,800W / 1,200W Tungsten : 2,000W
Voltage	Daylight : 140V / 100V Tungsten : 100 - 250V AC
Parabolic Reflector	Ø498mm (19.6in)
Protective Lens	Ø500mm (19.6in)
Lamp Type	HMI 1800W SE / 1200W SE Tungsten 2000W SE
Lamp Base	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	180 °C (356 °F)
Min. Distance to Illuminated Object	6.75m (22.1ft)
Min. Distance to Flammable Object	1.2m (3.9ft)
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	40kg (88.1lbs)

DIMENSIONS (in)

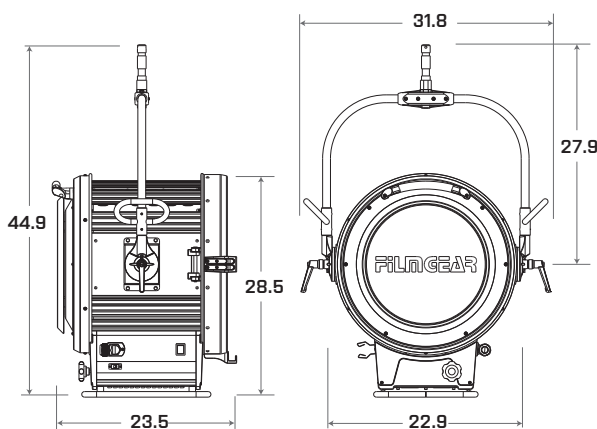

PHOTOMETRIC DATA


DAYLIGHT 1.8kW/1.2kW

		7m (22.9ft)	20m (65.6ft)	35m (114.8ft)	50m (164ft)	75m (246ft)
1.8kW Spot	Lux	253061	31000	10122	4960	2204
	Beam Ø	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)
1.8kW Flood	Lux	17270	2116	691	338	150
	Beam Ø	1.84 m (6ft)	5.27 m (17.2ft)	9.22 m (30.2ft)	13.17 m (43.2ft)	19.75 m (64.7ft)
1.2kW Spot	Lux	164898	20200	6596	3232	1436
	Beam Ø	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)	0.49 m (1.6ft)
1.2kW Flood	Lux	10765	1319	431	210	94
	Beam Ø	1.84 m (6ft)	5.27 m (17.2ft)	9.22 m (30.2ft)	13.17 m (43.2ft)	19.75 m (64.7ft)


TUNGSTEN 2000W

		7.5m (24.6ft)	20m (65.6ft)	35m (114.8ft)	50m (164ft)
2kW Spot	Lux	35556	5000	1633	800
	Beam Ø	0.83 m (2.7ft)	2.2 m (7.2ft)	3.85 m (12.6ft)	5.5 m (18ft)
2kW Flood	Lux	1557	219	72	35
	Beam Ø	3.38 m (11ft)	9 m (29.5ft)	15.75 m (51.6ft)	22.5 m (73.8ft)


ACCESSORIES




1.8kW/1.2kW/575W Electronic Ballast




1.8kW/1.2kW Head to Ballast Cable



2kW Cable (Bare End)



Scrim with Bag



Transport Case