




Tungsten Fresnel 150W Junior

■ LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø50mm (2 in.) Fresnel Lens
- In-Line Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

■ DIMENSIONS (in)

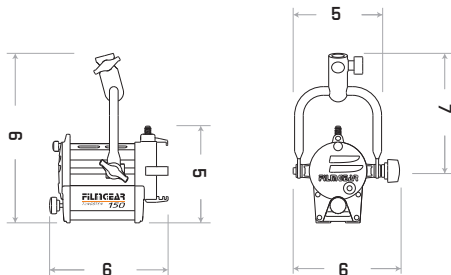

Tungsten Fresnel 150W Junior

■ SPECIFICATIONS

Identity No.	L00150TJ	
Capacity	150W	
Voltage	100 - 250V AC	
Fresnel Lens	Ø50mm (2 in.)	
Lamp Type	150W SE	
Color Temp.	3200K	
Lamp Holder	GX6.35	
Stirrup	Ø16mm (5/8 in.) Socket	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	190 °C	[374 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	0.5 m	[1.6 ft]
Min. Distance to Flammable Object	0.5 m	[1.6 ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (lamphead)	1.4 kg	[3.1 lbs]
Weight (with barndoor)	1.5 kg	[3.3 lbs]

■ ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø76mm (3 in.):

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Variable Snoot

Safety Cable (for lamphead)

Safety Wire (for barndoor)

■ PHOTOMETRIC DATA

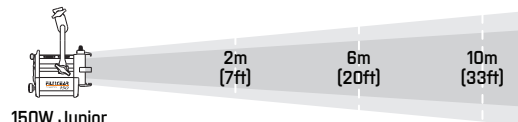

150W Junior

Spot (13°)

Lux	1511	168	60
Beam Ø	0.46m (1.5ft)	1.37m (4.5ft)	2.28m (7.5ft)

Flood (44°)

Lux	500	56	20
Beam Ø	1.62m (5.3ft)	4.85m (15.9ft)	8.08m (26.5ft)