


Comet 135c

LED RGB PANEL Yoke Mount

■ LAMPHEAD CONTENTS

- Lamp Housing with DMX
- M.O. / P.O. Stirrup with Ø28mm Spigot
- AC Cable
- DC Cable

* M.O. = Manual Operated
P.O. = Pole Operated

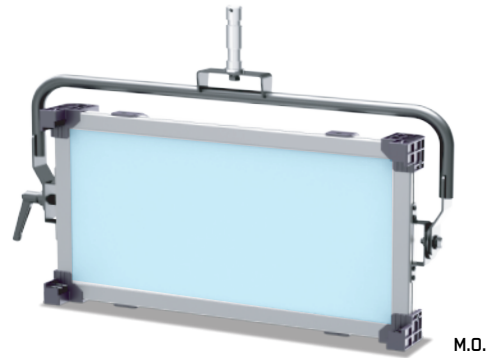

* Pole Operated Optional

COMET 135C (Yoke Mount)

■ SPECIFICATIONS

Identity No.	L001SLSC (M.O.)	
	LP01SLSC (P.O.)	
Max. Capacity	135W	
Input Voltage	95 - 260V AC	
	22 - 36 DC	
Input Current	0.6A @ 220V AC	
	5.5A @ 24V DC	
Color Temp. Range	2700K - 10000K	
Color	R/G/B/W/CW color mixing	
CRI	Average >95	
TLCI	Average >95	
Dimming Range	0-100%	
Control Signal	DMX / RDM	
DMX Channel	Varied (depends on DMX mode selection)	
LED Lifetime	30,000 Hrs (Estimated)	
M.O. / P.O. Stirrup	with Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	60 °C	(140 °F)
Max. Ambient Temp.	45 °C	(113 °F)
Operating Range	+90° ~ 0° ~ -90°	
Weight (Lamphead)	(M.O.): 8 kg	(18 lbs)
	(P.O.): 10 kg	(22 lbs)

■ ACCESSORIES


4-leaf Barndoor

Eggcrate


P.O. Stirrup with Ø28mm (1.1 in) Spigot

Safety Cable (for lamphead)

■ DIMENSIONS (in)

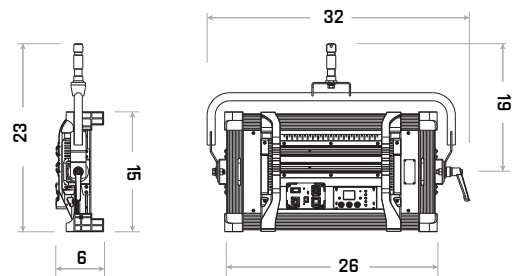


M.O.


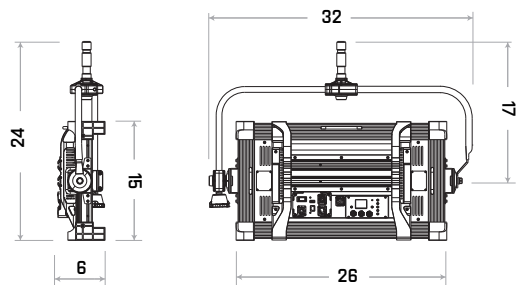


P.O.


■ CONTROL PANEL

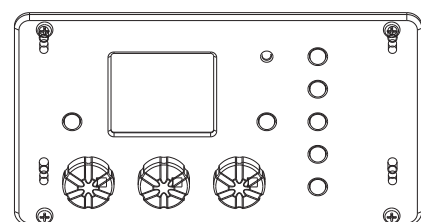

■ PHOTOMETRIC DATA

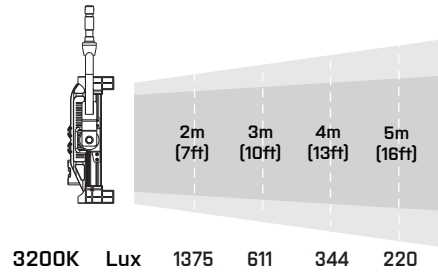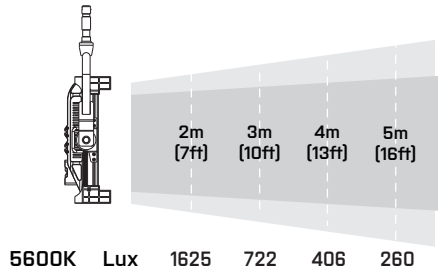


■ SPECTRUM

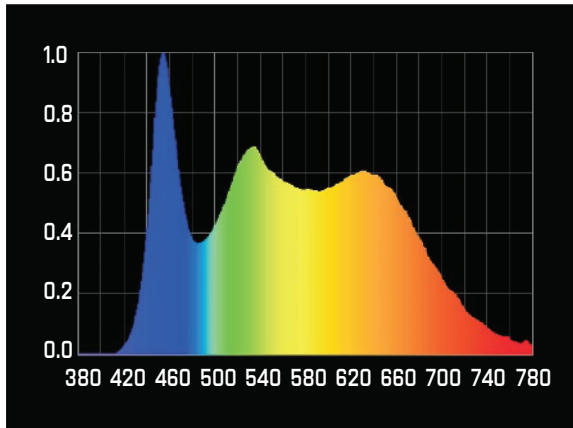


5600K


■ HISTOGRAM

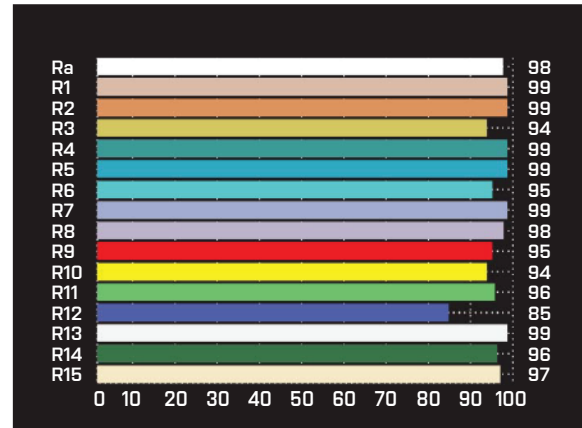

5600K

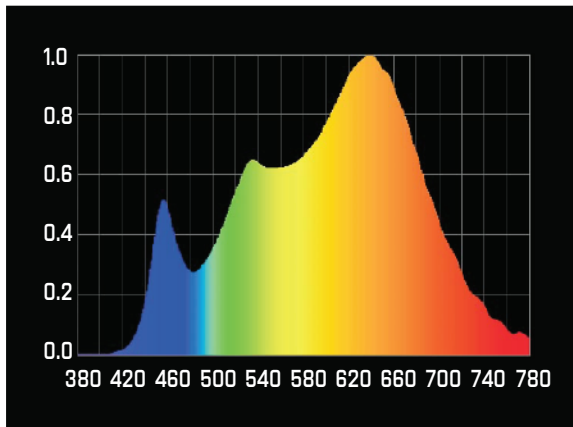

3200K

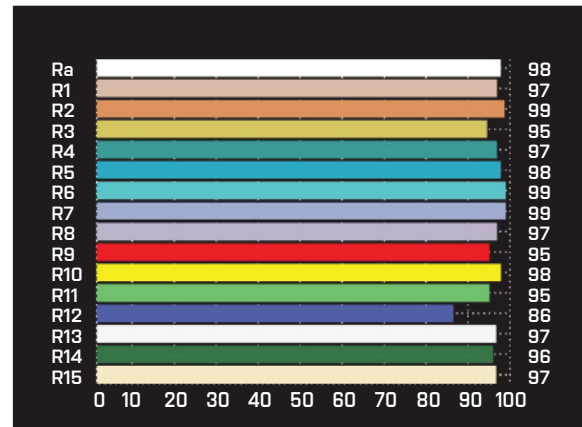

3200K