


LED CCT Soft Panel 100 (Yoke Mount)

LAMPHEAD CONTENTS

- Lamp Housing with DMX
- Stirrup with Ø28mm Spigot
- AC Cable
- DC Cable

* M.O. = Manual Operated
P.O. = Pole Operated

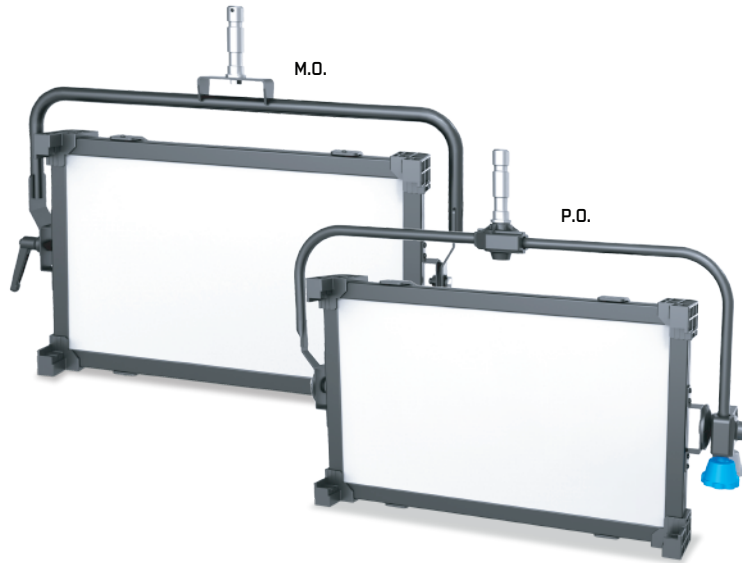

LED CCT Soft Panel 100 (Yoke Mount)

SPECIFICATIONS

| | | |
|---------------------|--------------------------|----------|
| Identity No. | L001SLSB(M.O.) | |
| | LP01SLSB(P.O.) | |
| Max. Capacity | 100W | |
| Voltage | 95 - 265V AC | |
| | 22 - 36V DC | |
| Frequency | 50Hz / 60Hz | |
| Current | 0.5A @ 220V 50Hz AC | |
| | 1A @ 110V 60Hz AC | |
| | 3.5A @ 30V DC | |
| Color Temp. | Adjustable 2700K - 5600K | |
| CRI | >95 | |
| TLCI | >95 | |
| Dimming Range | 0-100% | |
| Control Signal | DMX 512 | |
| DMX Channel | 2 | |
| LED Life | Approx. 30,000 Hrs | |
| M.O. / P.O. Stirrup | Ø28mm(1-1/8 in.) Spigot | |
| Class / IP Rating | 1 / IP 23 | |
| Max. Surface Temp. | 70 °C | (158 °F) |
| Max. Ambient Temp. | 45 °C | (113 °F) |
| Operating Range | +90° ~ 0° ~ -90° | |
| Weight | (M.O.): 10.0 kg | [22 ft] |
| | (P.O.): 12.0 kg | [26 ft] |

ACCESSORIES


4-leaf Barndoor

Eggcrate


P.O. Stirrup with Ø28mm Spigot

Safety Cable(for lamphead)

DIMENSIONS (in)

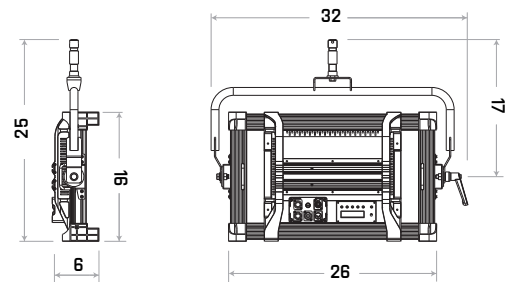


M.O.


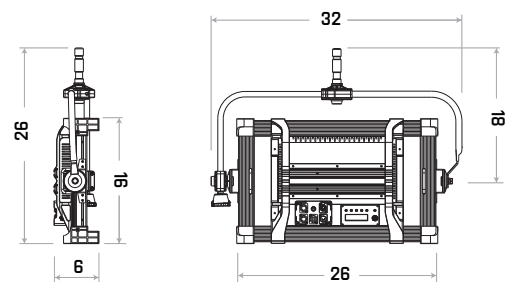


P.O.


CONTROL PANEL

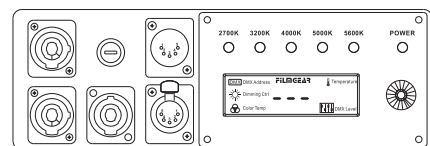

■ PHOTOMETRIC DATA

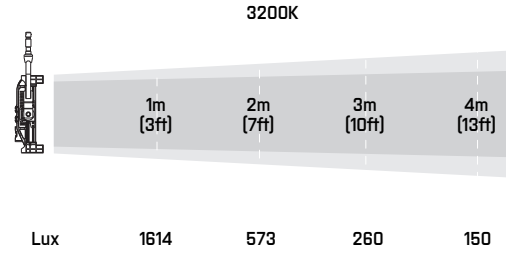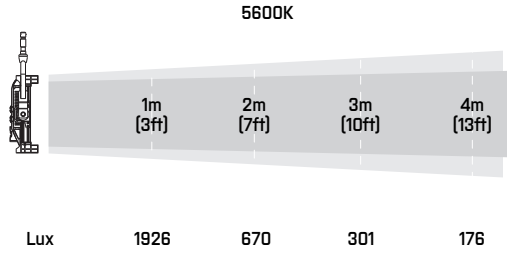

■ SPECTRUM

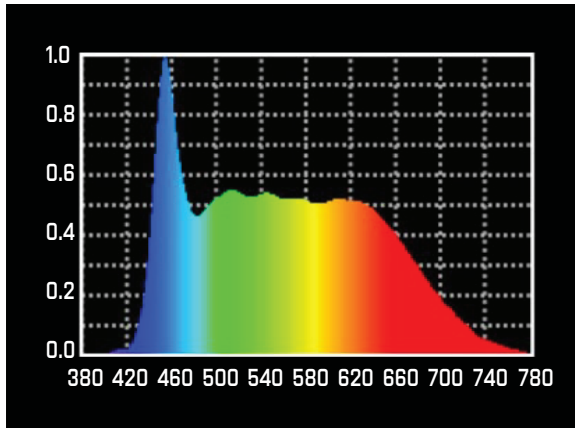

■ HISTOGRAM

