


LED Fresnel 150W




■ SPECIFICATIONS

Identity No.	L00151LS (M.O. / Daylight) L00150LS (M.O. / Tungsten) LP0151LS (P.O. / Daylight) LP0150LS (P.O. / Tungsten)	
Capacity	150W	
Voltage	95 - 265V AC	
Frequency	50Hz / 60Hz	
Current	1.6A - 0.6A	
Fresnel Lens	Ø130mm (5-1/8 in.)	
Color Temp.	5600K / 3200K	
CRI	>90	
Beam Angle	15° - 50°	
Dimming Range	0-100%	
LED Life	Approx. 30,000 Hrs	
M.O. / P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 20	
Max. Surface Temp.	70 °C	(158 °F)
Max. Ambient Temp.	45 °C	(113 °F)
Min. Distance to Illuminated Object	1 m	(3.3 ft)
Min. Distance to Flammable Object	0.5 m	(1.6 ft)
Operating Range	+90° ~ 0° ~ -90°	
Weight (Lamphead)	(M.O.): 6.5 kg	(14.3 lbs)
	(P.O.): 7.0 kg	(15.4 lbs)

■ DIMENSIONS (in)

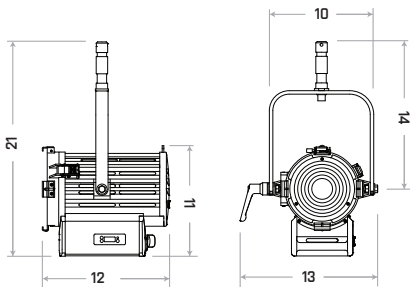

M.O.

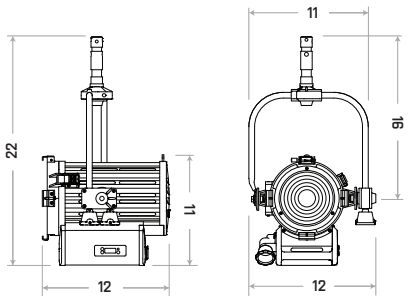


P.O.

■ PHOTOMETRIC DATA



Color Temp. 5600K

Spot (15°)	Lux	3524	1997	1324
Beam Ø		0.79m (2.6ft)	1.05m (3.4ft)	1.32m (4.3ft)
Flood (50°)	Lux	1127	658	435
Beam Ø		2.90m (9.2ft)	3.73m (12.2ft)	4.66m (15.3ft)



Color Temp. 3200K

Spot (15°)	Lux	3234	1838	1218
Beam Ø		0.79m (2.6ft)	1.05m (3.4ft)	1.32m (4.3ft)
Flood (50°)	Lux	1030	607	403
Beam Ø		2.80m (9.2ft)	3.73m (12.2ft)	4.66m (15.3ft)

■ LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Fresnel Lens
- M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Filter Frame
- Power Cable
- DMX

■ ACCESSORIES

- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims : Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Power Cable

* [M.O.] = Manual Operated
[P.O.] = Pole Operated