

Aurora 200c

LED HIGH POWER RGB PANEL

LAMPHEAD CONTENTS


- Lamp Housing with Soft Diffusion Filter
- M.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable



AURORA 200C

SPECIFICATIONS



Identity No.	L0020RGB
Max. Capacity	200W
Voltage	95V - 260V AC
	22V - 36V DC
Current	1A @ 220V AC
	8.5A @ 24V DC
Color Temp. Range	2700K - 10000K
Color	R/G/B/W/CW color mixing
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX / RDM
DMX Channel	Varied (depends on DMX mode selection)
LED Life Time	30,000 Hrs (Estimated)
Stirrup	with Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° - 0° - -90°
Weight (Lamphead)	9 kg




ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skirt
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)




■ PHOTOMETRIC DATA

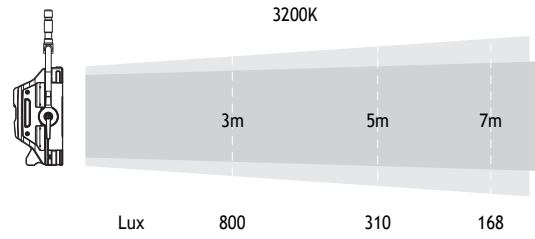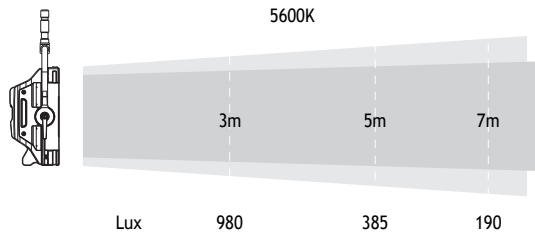

■ SPECTRUM

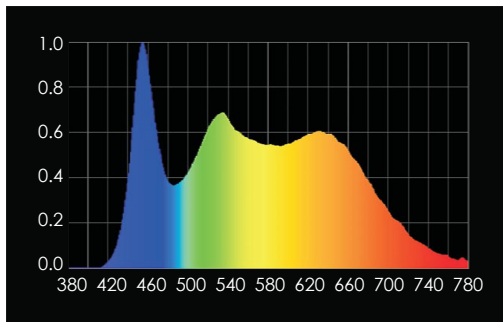

■ HISTOGRAM

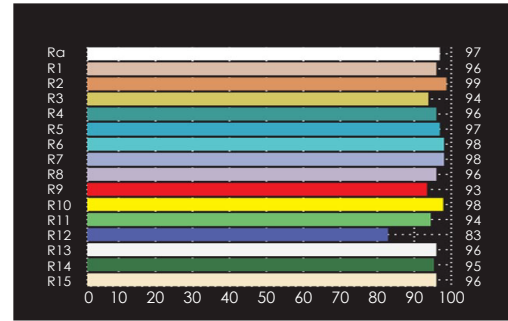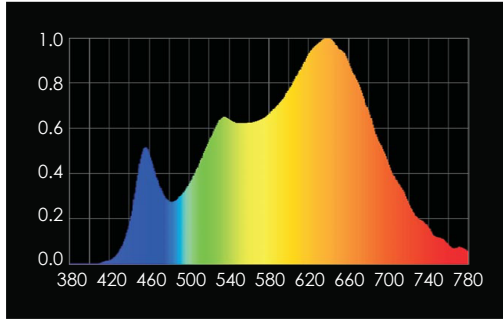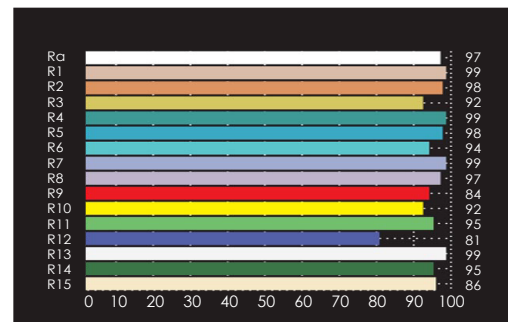

■ DIMENSIONS (mm)

