



Daylight Fresnel 2500W SE

■ LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø250mm (10 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 2500W SE

■ SPECIFICATIONS

Identify No.	L02500DS	
Capacity	2,500W	
Lamp Bulb Voltage	115V	
Fresnel Lens	Ø250mm	(9-7/8 in.)
Lamp Type	MSR 2500HR or HMI 2500W/SE	
Color Temp.	5600K	
Lamp Holder	G38	
Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	160 °C	[320 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	8 m	[26 ft]
Min. Distance to Flammable Object	1 m	[3 ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (lamphead)	17.1 kg	[37.7 lbs]
Weight (with barndoor)	18.8 kg	[41.4 lbs]

■ ACCESSORIES

Electronic Ballast V3 : 4kW/2.5kW or 2500W

Lamphead to Ballast Cable : 7m [23 ft.] or 15m [49 ft.]

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø330mm (13 in.):


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

■ PHOTOMETRIC DATA

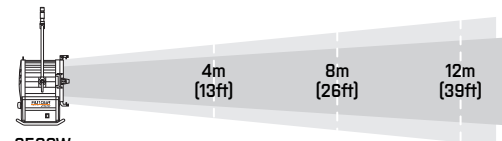

2500W			
Spot (7°)			
Lux	106366	26591	11818
Beam Ø	0.49m (1.6ft)	0.98m (3.2ft)	1.47m (4.8ft)
Flood (60°)			
Lux	8099	2025	900
Beam Ø	4.62m (15.2ft)	9.24m (30.3ft)	13.86m (45.5ft)

■ DIMENSIONS (in)

