



## Daylight Fresnel 4000W SE

### LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Fresnel 4000W SE

### SPECIFICATIONS

|                                     |                            |              |
|-------------------------------------|----------------------------|--------------|
| Identify No.                        | L04000DS                   |              |
| Capacity                            | 4,000W                     |              |
| Lamp Bulb Voltage                   | 200V                       |              |
| Fresnel Lens                        | Ø300mm                     | (11-3/4 in.) |
| Lamp Type                           | MSR 4000HR or HMI 4000W/SE |              |
| Color Temp.                         | 5600K                      |              |
| Lamp Holder                         | G38                        |              |
| Stirrup                             | Ø28mm (1-1/8 in.) Spigot   |              |
| Class / IP Rating                   | 1 / IP 23                  |              |
| Max. Surface Temp.                  | 170 °C                     | [338 °F]     |
| Max. Ambient Temp.                  | 45 °C                      | [113 °F]     |
| Min. Distance to Illuminated Object | 10 m                       | [33 ft]      |
| Min. Distance to Flammable Object   | 1.2 m                      | [3.9 ft]     |
| Operating Range                     | +45° ~ 0° ~ -45°           |              |
| Weight (lamphead)                   | 21.8 kg                    | [48 lbs]     |
| Weight (with barndoor)              | 24.3 kg                    | [53.5 lbs]   |

### ACCESSORIES

Electronic Ballast V3 : 4kW/2.5kW

Lamphead to Ballast Cable : 7m [23 ft.] or 15m [49 ft.]

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø394mm (15-1/2 in.):


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

### PHOTOMETRIC DATA

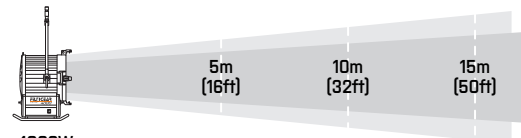

4000W

Spot [6°]

|        |                  |                  |                  |
|--------|------------------|------------------|------------------|
| Lux    | 75144            | 18786            | 8349             |
| Beam Ø | 0.52m<br>(1.7ft) | 1.05m<br>(3.4ft) | 1.57m<br>(5.1ft) |

Flood [64°]

|        |                   |                  |                    |
|--------|-------------------|------------------|--------------------|
| Lux    | 6961              | 1740             | 773                |
| Beam Ø | 6.25m<br>(20.5ft) | 12.50m<br>(41ft) | 18.75m<br>(61.5ft) |

### DIMENSIONS (in)

