Maxibrute 9

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (black color)
- Wire Guard
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

Maxibrute 9

SPECIFICATIONS

Identity No.	L09001C0MXB (220V)
	L092S1C0MXB (220V)
	L09001C1MXB (110V)
	L092S1C1MXB (110V)
Capacity	9,000W
Voltage	220 - 240V AC or
	110 - 120V AC
Lamp Type	Par64 1000W 120V/240V
Color Temp.	5000K / 3200K
Lamp Holder	GX16d
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	8 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	22.0 kg

ACCESSORIES

2-leaf Barndoor
Safety Wire (for barndoor)
Filter Frame Outrigger
Studio Dolly

INPUT PANEL

L09001C0MXB, L09001C1MXB :
1 x CEE 63A 2P+E
L092S1C0MXB, L092S1C1MXB :
2 x Socapex, 1 x CEE 63A 2P+E

DIMENSIONS (mm)

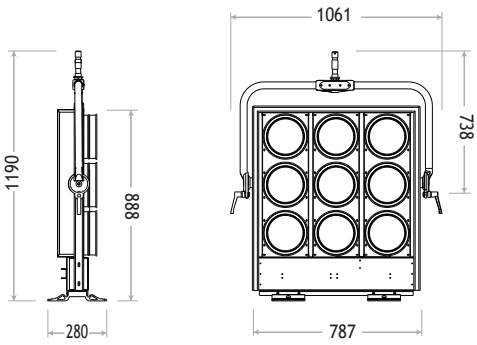

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. @ 20180501

Film Gear (International) Ltd. No.7, Cumberland Road, Kowloon Tong, Hong Kong (852) 2794 3608 (852) 2794 3662 info@filmgear.net
Film Gear USA Group 9528 East Rush Street, Suite A South El Monte, CA 91733, U.S.A (323) 780-8880 joanna@filmgearusa.com
www.filmgear.net