



## Daylight Boxer 400W

### LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
- 4-leaf Rotatable Barndoor with Safety Wire
- Set of 5 Par Lenses with Lens Case
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket
- Glass Beaker
- Reflector

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Boxer 400W

### SPECIFICATIONS

Identity No.	L00400BX	
Capacity	400W	
Lamp Bulb Voltage	6.3A / 70V AC	
Par Lens	Ø130mm (5-1/8 in.)	
Lamp Type	HMI 400W SE	
Color Temp.	5600K	
Lamp Holder	GZZ9.5	
Stirrup	Ø16mm (5/8 in.) Socket	
Class / IP Rating	1 / IP 20	
Max. Surface Temp.	170 °C	[339 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	3 m	[10 ft]
Min. Distance to Flammable Object	0.5 m	[2 ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (Lamphead)	1.3 kg	[3 lbs]

### ACCESSORIES

Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC

Lamphead to Ballast Cable : 7m [23 ft.] or 15m [49 ft.]

DC Cable

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case

Spot, Medium Flood, Wide Flood,

Super Wide Flood, Frosted Super Flood

Safety Cable (for lamphead)

Safety Wire (for barndoor)

T-Ring

Softbox

Lantern


Barrel Adapter

Lamp Holder Extension

### PHOTOMETRIC DATA

		3m (10ft)	5m (17ft)	7m (23ft)	
400W	Spot [9°]	Lux Beam Ø	173271 0.47m (2ft)	62378 0.79m (3ft)	31825 1.10m (4ft)
	Medium Flood [10° x 20°]	Lux Beam Ø	17058 0.52 x 1.06 m (2 x 4 ft)	6141 0.87 x 1.76 m (3 x 6 ft)	3133 1.22 x 2.47 m (4 x 9 ft)
Wide Flood [20° x 42°]	Lux Beam Ø	4982 1.06 x 2.30 m (4 x 8 ft)	1794 1.76 x 3.84 m (6 x 13 ft)	915 2.47 x 5.37 m (9 x 18 ft)	
	Super Wide Flood [40°]	Lux Beam Ø	2110 2.18m (8ft)	760 3.64m (12ft)	388 5.10m (17ft)
Frosted Super Flood [34°]	Lux Beam Ø	1616 1.83m (6ft)	582 3.06m (10ft)	297 4.28m (14ft)	


### DIMENSIONS (in)

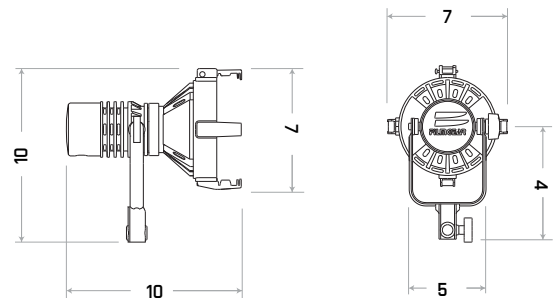


Daylight Boxer with Reflector

■ ACCESSORY CONFIGURATION


**Daylight Boxer with Reflector**



Reflector




**Daylight Boxer with Softbox**




T-ring


+



Softbox




**Daylight Boxer with Lantern**




T-ring

+



Lantern




**Daylight Boxer with Barrel**



Barrel Adapter

+



Lamp Holder Extension

