

Aurora 400B

LED HIGH POWER CCT PANEL

LAMPHEAD CONTENTS

- Lamp Housing with Soft Diffusion Filter
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable

ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skirt
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)




AURORA 400B


SPECIFICATIONS

Identity No.	L0040CCT
Max. Capacity	400W
Voltage	95 - 260V AC
	22 - 36V DC
Current	2A @ 220V AC
	17A @ 24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life Time	30,000 Hrs (Estimated)
Stirrup	with Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C (140 °F)
Max. Ambient Temp.	45 °C (113 °F)
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	13 kg (29 lbs)



PHOTOMETRIC DATA

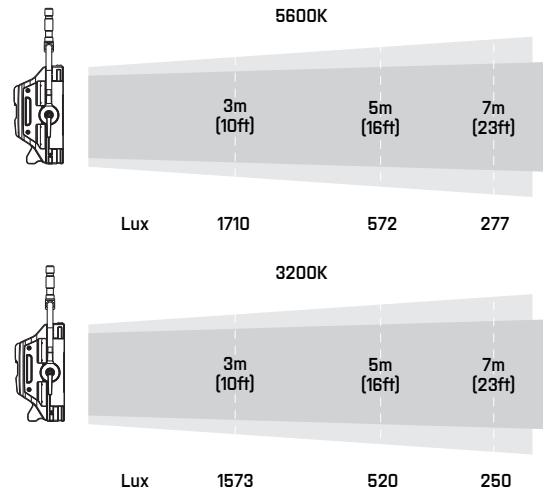

DIMENSIONS (in)

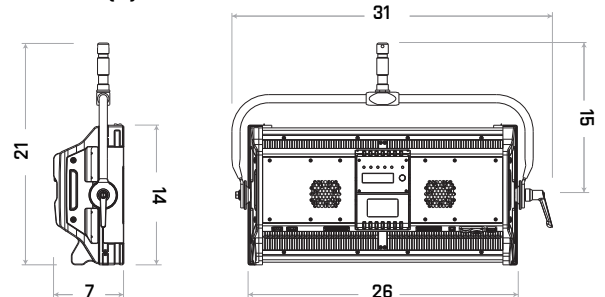

SPECTRUM



HISTOGRAM

