

Helios 500_B

LED CCT SPACE LIGHT

LAMPHEAD CONTENTS


- Lamp Housing
- Hanging Wire
- Black Skirt
- Silk Skirt
- Target Assembly
- AC Cable



Black Skirt




Silk Skirt



Stirrup



Octagon Eggcrate





Octagon Soft Box

HELIOS 500B

SPECIFICATIONS

Identity No.	L0050SLB(220V)
	L0051SLB (110V)
Max. Capacity	480W
Voltage	190V - 260V AC or 95V - 135V AC
Current	2.2A@ 220V AC 4.4A@ 110V AC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	3
LED Life Time	30,000 Hrs (Estimated)
Max. Surface Temp.	60 °C (140 °F)
Max. Ambient Temp.	45 °C (113 °F)
Weight (Lamphead)	12 kg (26 lbs)

DIMENSIONS (in)



Black Skirt :
Ø29 x H 23

Silk Skirt :
Ø24 x H 17

Target Assembly :
Ø25

ACCESSORIES

Stirrup with Ø28mm(1-1/8 in.) Spigot(for Yoke Mount)


Octagon Soft Box(for Yoke Mount)

Octagon Eggcrate(for Yoke Mount)


Diffusion Cloth (for Yoke Mount)

■ PHOTOMETRIC DATA

Position \ Color Temp.	5600K	3200K
Center 3m/9.8ft High <A>	1620 Lux	1422 Lux
Center 6m/20ft High 	405 Lux	355 Lux
Center 9m/30ft High <C>	180 Lux	158 Lux
Distance 2m/7ft <D>	131 Lux	111 Lux
Distance 4m/13ft <E>	70 Lux	65 Lux
Distance 6m/20ft <F>	40 Lux	35 Lux

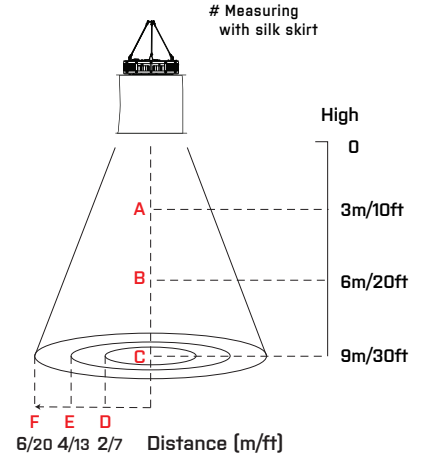


■ SPECTRUM

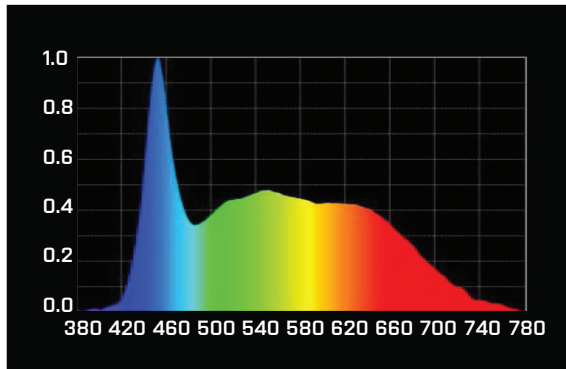


5600K


■ HISTOGRAM

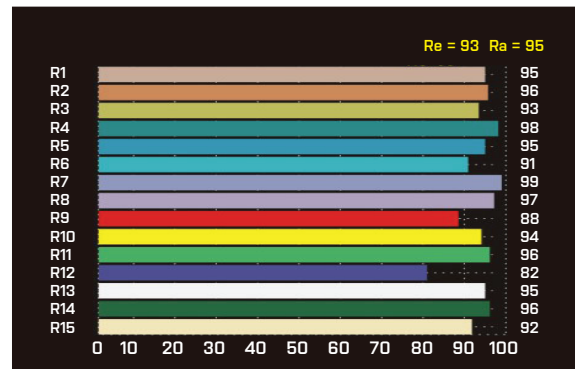

5600K

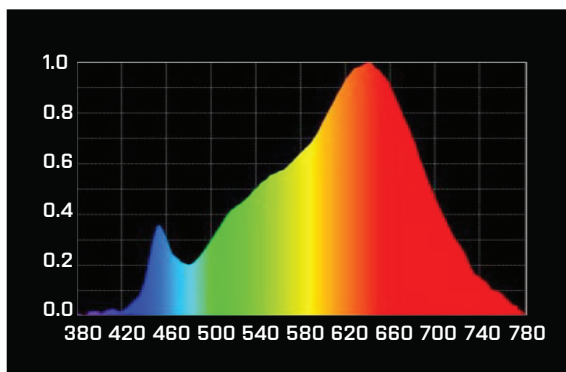

3200K

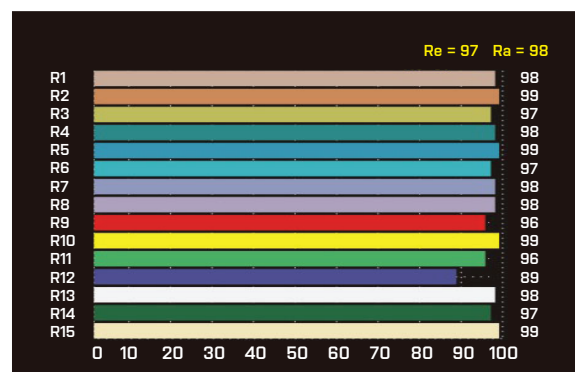

3200K